VELTEKO
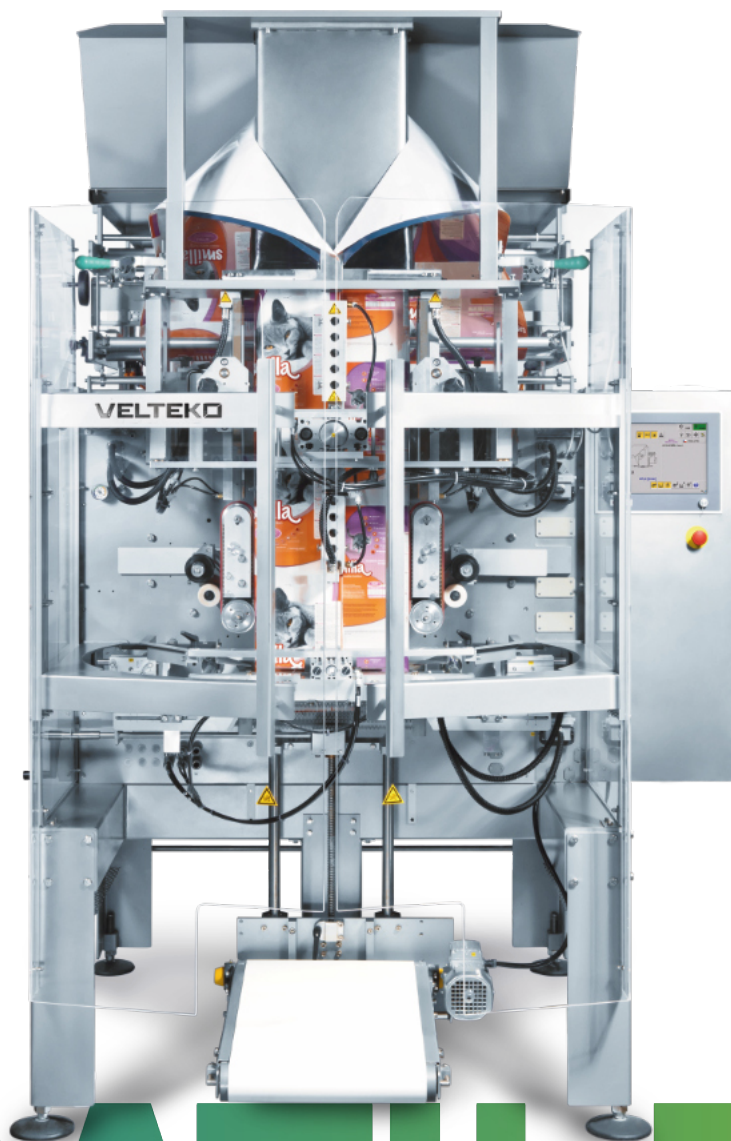
VELTEKO

VERSATILE-440

The versatility of VELTEKO vertical packaging machines allows you to customize your machine to meet the current needs of the market and your individual technical requirements.

VERSATILITY

ONE MACHINE FOR YOUR CURRENT AND FUTURE REQUIREMENTS

up to **60l** bags

10–60 minute changeover time between bags

16 *variations of standup pouches*

51 *different types of bags*

10 *applicators for extended bag functionality*

51 different types of bags

3-side seal bag
80–380
60–380

Pillow bag
100–600 (950)
152–440

Gusseted bag
100–550 (900)
102–380
52–140

Flat bottom bag
100–510 (800)
102–380
52–140

Corner creased bag
100–510 (800)
102–380
52–140

Quad seal bag
100–480 (800)
102–380
52–140

FlexCan
44–180
60–300
42–102

Type G bag
300–440
150–300
0–100

Standup pouch
120–380
120–380
52–100

Standup pouch
120–380
120–380
52–100

16 *variations of standup pouches*

Quad seal bag
100–480 (800)
102–380
52–140

Flat bottom bag
100–510 (800)
102–380
52–140

Wide Range of Applicators for Extended Bag Functionality

Zipper

Ultrazip

Carry Handle

Label

External Degassing Valve

Internal Degassing Valve

Printers

Advertising tape

TOP variations of standup pouches continuously created on 1 vertical packaging machine
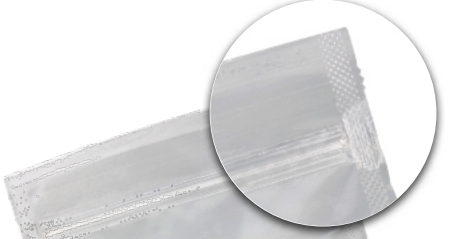
Standup pouch with euroslot

Standup pouch with carry handle

Standup pouch with reclosable flap

Standup pouch with zipper

Standup pouch with zipper and euroslot

Standup pouch with zipper and carry handle

STANDUP POUCH

by VELTEKO VFFS machines

16 variations of standup pouches

45 min changeover to different bag type

www.velteko.com

VELTEKO

Ease of operation

VT+ Modules
(Versatile Technology Plus)

VT+modules simplify format changing thus reducing machine changeover time and the demands on operator skills.
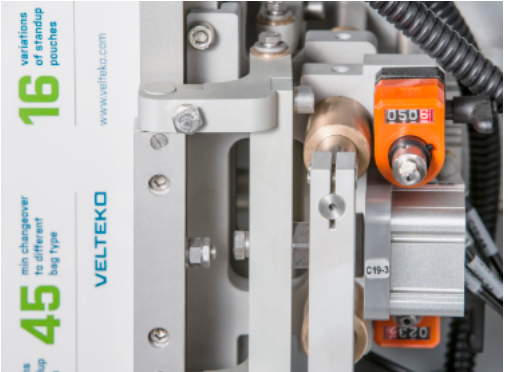
1.

Dials and Scale Indicators

All manual equipment is equipped with dials or scale indicators to ensure consistent settings.

2.

Unwinding packaging film roll

Automatically regulates the operating parameters of the machine when unwinding film rolls.

3.

Position of foil edge sensor and photo cell

Position adjustable by servomotor.

Position setting can be saved to memory.

4.

Positions of film rollers

For location of print data (label) and for adjusting the entrance angle of the film on the collar.

Digitally monitored.

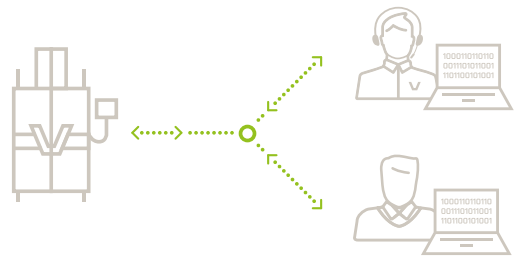*Position setting can be saved as a program.*

VELTEKO Dataservice

Various data generated during machine operation is recorded and saved. VELTEKO dataservice enables this data to be used e.g. for production control and management and/or for machine diagnostics.

3 packs

Dataservice Support

For remote communication between the machine and the user and/or between the machine and the VELTEKO Service Department.

- ☐ USB and LAN ports
- ☐ VPN router for a secure connection
- ☐ Optional IP Service Camera for online transmission of video and audio

Dataservice Visual

Full monitoring of machine use and its technical status from any place in the world that has access to the internet. Dataservice Visual comes as standard equipment on VELTEKO machines.

Dataservice OPC

A versatile software tool that makes all machine data available for any evaluation system.

Human-machine interface
for intuitive setting of the machine's operational parameters

- ☐ A powerful industrial PC with a large color touch screen.
- ☐ Customizable control via icons or buttons with text descriptions.
- ☐ Assistance in choosing operating parameters.
- ☐ 500 memory settings for operating parameters (programs) with export and backup.
- ☐ Possibility of automatic selection of programs by scanning a barcode.
- ☐ Identification of the machine operator via card or RFID chip.

- ☐ User manual, wiring diagram, etc. can be accessed on the terminal's touch screen.
- ☐ Image Manager - Import, export, and delete images via the terminal and even capture images from the system's camera.
- ☐ Video Manager – Upload and playback of videos.
- ☐ Extensive help section.
- ☐ Dataservice Visual.

VELTEKO Philosophy

Provide customers around the world with a wide range of versatile and specialized vertical packaging solutions tailored to their individual needs.

## Advanced Engineering, Design and Construction

Extreme reliability and an extra long service life are a direct result of VELTEKO's cutting edge engineering and design, combined with precise manufacturing in the Czech Republic using the highest quality materials and branded components.

We supply complete packaging systems

- Upstream and downstream systems
- Custom project engineering
- Technical and engineering support throughout the packaging system's life cycle

PRODUCT
BUFFER
DOSER
PACKAGING MACHINE
PRODUCT IN BAGS
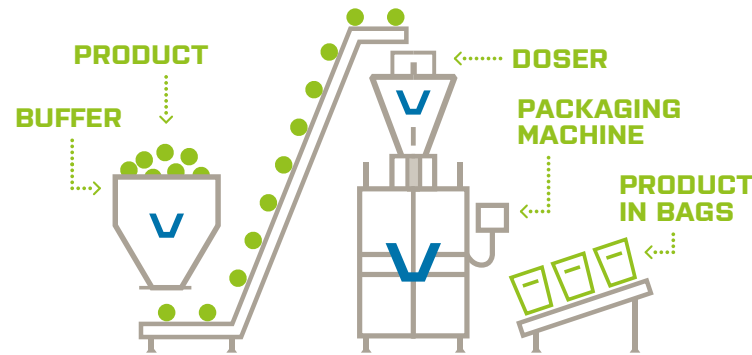
Technical parameters
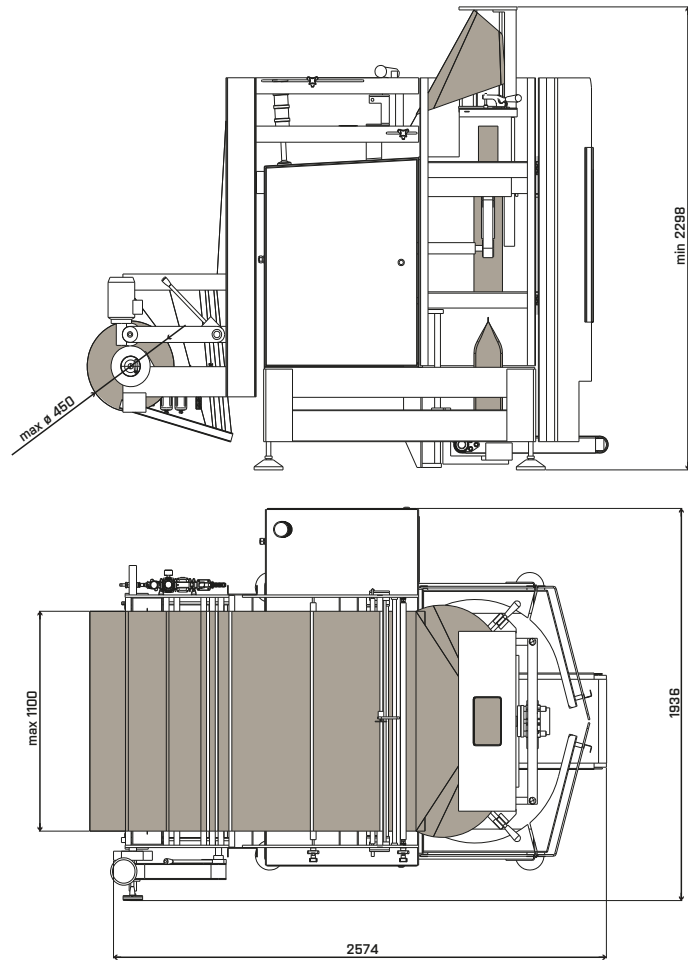
	VERSATILE-440-A
Operating mode	Intermittent
Max. practical speed	Up to 50 bags/min
Max. dimension of cross seal	440mm
Protection	IP54
Construction materials	Stainless steel / Painted execution

Easy to maintain

- Dataservice support.
- Monitoring of service intervals, depending on the type of machine operation.
- Extensive self-diagnostics and monitoring.
- Ability to set access rights to individual controls.
- Sensors with connectors for easy replacement.
- Interactive manual and spare parts catalog for each specific machine configuration.
- Automatic check for pneumatic leaks.
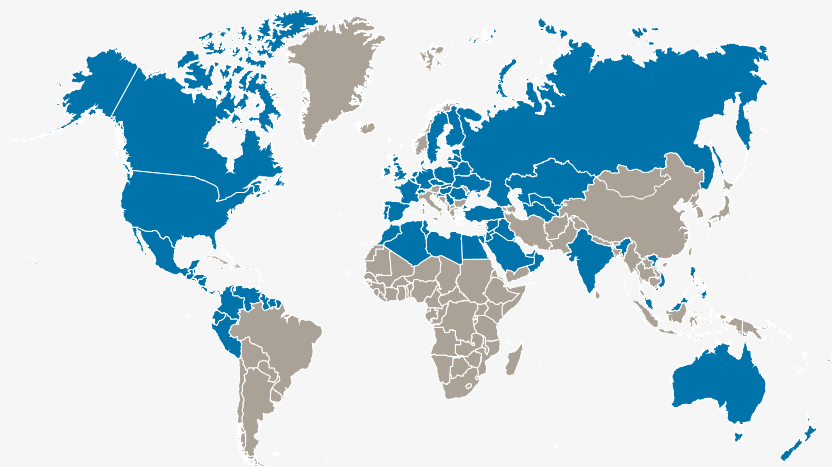- Support from VELTEKO's Service Center.
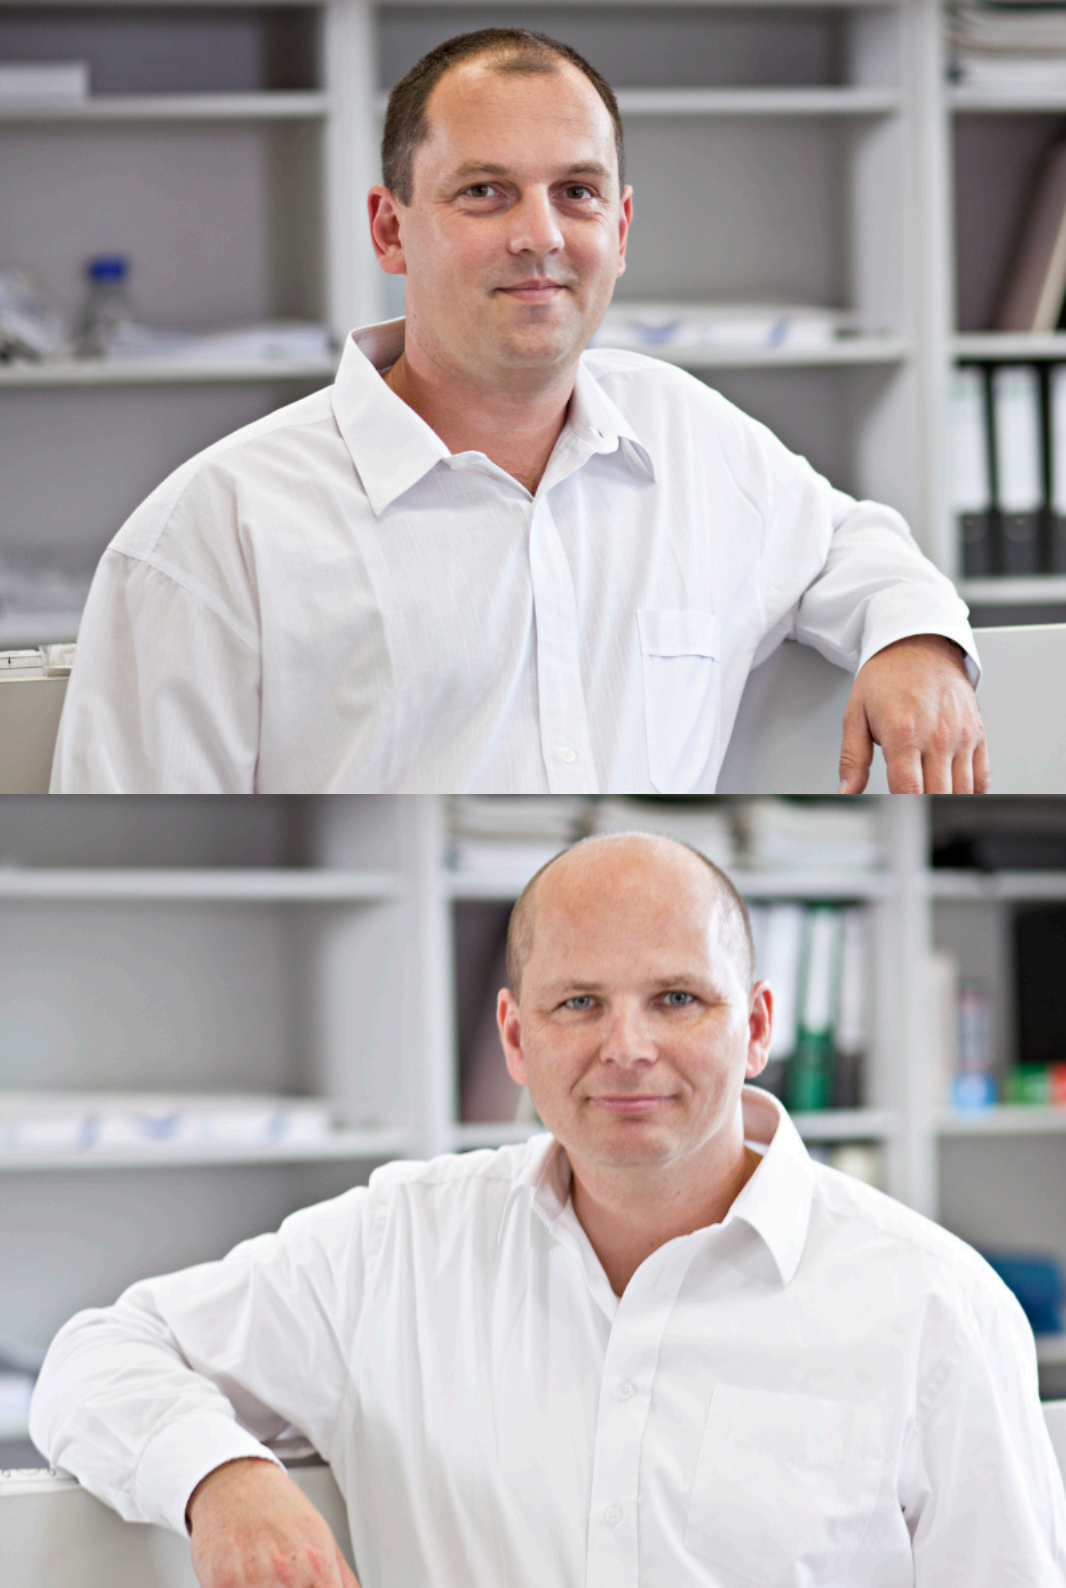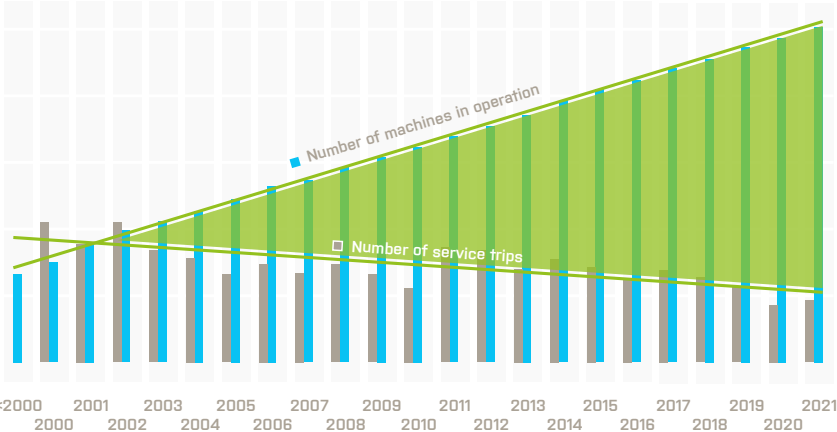
Contacts

VELTEKO CZ s.r.o.
K Borovickam 1716
258 01 Vlasim
Czech Republic
Tel. +420 317 846 473
velteko@velteko.cz

VELTEKO POLSKA Sp. z o. o.
Ul. Sw. Michala 43
61-119 Poznań
Polska
Tel. + 48 61 650 34 07
velteko@velteko.pl

GLOBAL SALES NETWORK

■ REGIONS COVERED BY VELTEKO DISTRIBUTORS

Your VELTEKO Distributor

www.velteko.com

More machines from our portfolio

US-100

- ☐ Up to 120 different bag types
- ☐ Tin Tie reclosing system
- ☐ Packaging of fragile products
- ☐ Custom product mixes

DUPLEX-360

- ☐ Maximum speed of 360 pillow or three-side sealed bags per minute
- ☐ Double tube design

VELTEKO – The vertical packaging machine experts