VELTEKO

Vertical packaging machine



DUPEX-36



Double
tube versions
of VELTEKO vertical
packaging machines
will provide you with

DOUBLE

the packaging speed in the same footprint, half the cost of product input and increased machine operating efficiency.

Max. speed of 400 bags/min.

5 bag types on 1 machine



Easy machine operation


VELTEKO Dataservice

for remote communication with machine

5–45 min. machine changeovers to another bag type

Trouble-free maintenance

5 bag types on 1 machine







Flat




Reclosing flap

Modifications for expanding bag functions





Advertising tape



Dataservice VELTEKO

3 packages

Dataservice Support



Dataservice Visual



Dataservice OPC



Trouble-free maintenance

- Dataservice support
- ☐ Service interval monitoring according to machine type
- Extensive self-diagnosis and monitoring
- Adjustable access rights to individual controls
- Plug-in sensors allow for easy replacement
- ☐ Interactive manual and parts catalog for specific machine configuration
- Automatic seal check of pneumatic components
- □ VELTEKO service center support

Easy machine operation

Graphic interface for intuitive setup of machine operating parameters

- Industrial computer with a large color display
- ☐ Intuitive control using icons or buttons with text descriptions
- Support for selecting operating parameters
- 500 memory settings for operating parameters (programs) with export and backup capability
- ☐ Possibility of automatic program selection by scanning the bar code
- ☐ Identification of machine operator by card or RFID chip
- Machine manual, wiring diagram, etc. on the terminal
- Image manager import, export, delete images on the terminal and take a picture with the on-board camera
- Video Manager Possibility to upload and play video files
- Extensive help section
- Dataservice Visual







Dials and scales

All manually set components are equipped with dials or scales to ensure repeatable settings.

Dosers suitable for the double tube version of DUPLEX-360 vertical packaging machines







DOS3D

up to **240** doses/min.

DOT3D

up to **360** doses/min.


YAMATO

up to 400 doses/min.

Technical specifications

- Robust, sophisticated modular design for high reliability and a long machine life
- Quality materials and branded components from world-renowned manufacturers
- A powerful industrial computer controls all machine functions

	DUPLEX-360
Operational mode	Continuous
Max. speed	Max. 400 bags/min
Max. length of cross weld	160 mm
Max. width of film	340 mm

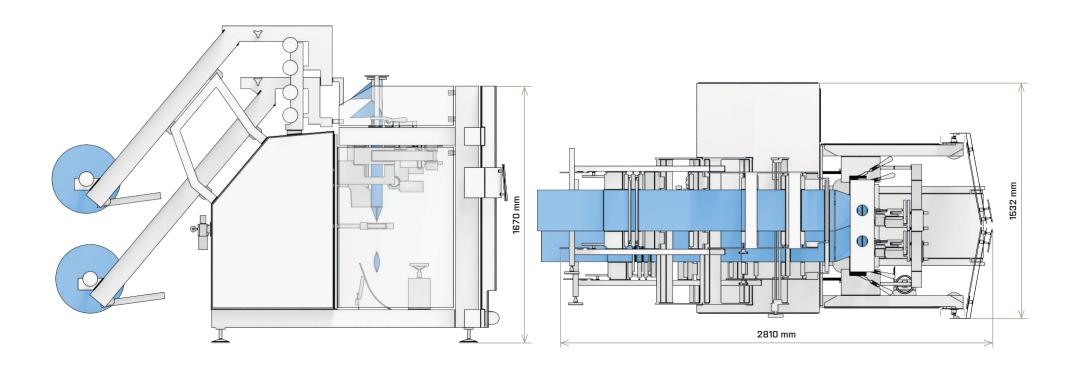

Contacts

VELTEKO CZ s.r.o. K Borovičkám 1716 258 01 Vlašim Česká republika Tel. +420 317 846 473 velteko@velteko.cz

VELTEKO POLSKA Sp. z o. o. Ul. Św. Michala 43 61-119 Poznań Polska Tel. + 48 61 650 34 07

velteko@velteko.pl

ООО «ВЕЛТЕКО РУС» 4-ая Тверская-Ямская, д. 33/39 125047 г. Москва Российская Федерация Тел. +7 495 799 93 78 velteko@velteko.ru

WORLDWIDE SALES



Markets where VELTEKO distributors are located

Your VELTEKO distributor

www.velteko.com

The content of this catalog is not an offer to conclude a contract, a promise to conclude a contract or any legal act of VELTEKO s.r.o., regardless of its content or designation. VELTEKO s.r.o. reserves the right to change the specifications of the machines shown and described in this catalog at any time. Photographs of the machines are for reference only and may include optional accessories. Please contact your local distributor for a customized offer.

More of our packaging machines



- Packaging of fragile products
- Custom product mix
- ☐ Tin Tie reclosable system



VERSATILE-280

- 1 machine for more than 100 different bag types
- Max. speed of 200 bags/min.
- 5–45 min. machine changeovers to a different bag type
- More than 16 types of doypack bags
- Streamline ultrasonic technology



VELTEKO – The vertical packaging machine experts